

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/004915 A1

(51) International Patent Classification⁷: B05B 1/18, 1/30

(21) International Application Number:
PCT/NO2003/000237

(22) International Filing Date: 4 July 2003 (04.07.2003)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
20023274 5 July 2002 (05.07.2002) NO

(71) Applicant (for all designated States except US): NOR-
WEC ASA [NO/NO]; Camilla Colletsvei 14, N-0258 Oslo
(NO).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LARSEN, Finn, Thv.
[NO/NO]; Camilla Colletsvei 14, N-0258 Oslo (NO).

(74) Agent: J.K. THORSENS PATENTBUREAU A/S; P.O.
Box 9276 Grønland, N-0134 Oslo (NO).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SHOWER HEAD

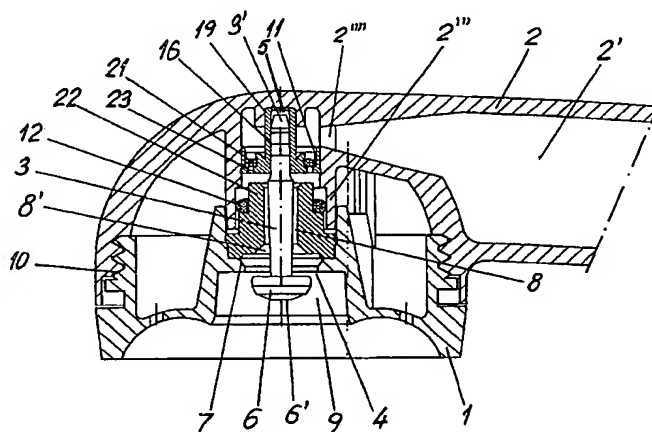

(57) Abstract: A shower head comprising a mouth piece (1) including a middle axial through channel (8) for flow through of water, a rotationally symmetrical deflection element (6) for the water being near the external outlet of the channel, which mouth piece (1) is connected to a holder (2) through which the water is fed, while the deflection element (6) is held by a stem (3) which with radial clearance projects axially in the channel, and is surrounded by a conical surface (7), the mouth piece (1) limiting a cavity (9) around and axially outside the deflection element (6), the conical surface (7) projecting convergently outwardly. The stem (3) may be conical at least in the portion being furthest away from the deflection element (6), whereby the surface of the stem (3) converges towards the deflection element (6), and whereby the flow area for the water between the stem (3) and the mouth piece (1) is altered by axial movement of the mouth piece (1) relatively to the holder (2). The stem (3) is secured in an insert (16) mounted in the holder (2), and a regulator (11, 21, 23) for causing an approximately constant amount of water per time unit at variations of the water pressure is mounted in the area at the inert (16), or possibly integrated therein.